

**4800 litres (1057 imp.gal.)
1 Piece, Low Profile
Holding Tank or Pump
Chamber Pg 2 of 2**

Details

Concrete Strength: 6500 psi (45 MPa) @ 28 Days
Air Entrainng: 5 - 7%
Reinforcement: 10 mm Rebar, Structural Fiber,
6x6x6 Gauge Wire Mesh
Joint Seal: Butyl Rope Sealant Or Equivalent
Design For Earth Dead Load Only
Maximum Sully: 1.5m (5')
Conforms To CSA B66-M2005

Options

Alternative Placement Of Inlet Holes
Plastic Risers Are Available

Other Notes



Pump Drawdown - 162 L (36 Gal) per inch
Weight: 13,000 lb (5900 kg)
Conforms To CSA B66M05
(Dalhousie University)

ISLAND

CONCRETE PRODUCTS LTD.
SYDNEY SITE
517 KELTIC DR.
Phone: 902-562-2426
PORT HASTINGS SITE
522 Hwy 105
Toll Free: 1-855-562-2426

BROOKFIELD

CONCRETE PRODUCTS LTD.
P. O. BOX 37, 778 HWY 2
BROOKFIELD, N. S.
B0N 1C0
Phone: 902-673-2225
Toll Free: 1-888-705-2225
Fax: 902-673-2255

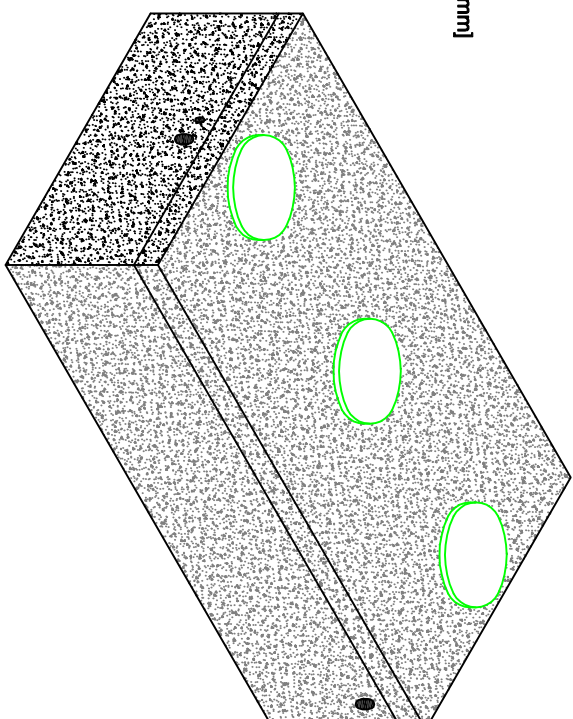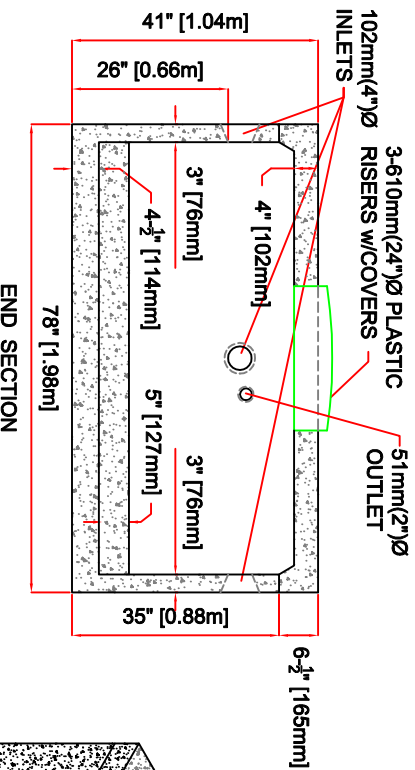

ISOMETRIC VIEW

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT:
LOCATION: Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists

e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings

e-mail: info@islandconcreteproducts.ca