


ISOMETRIC VIEW

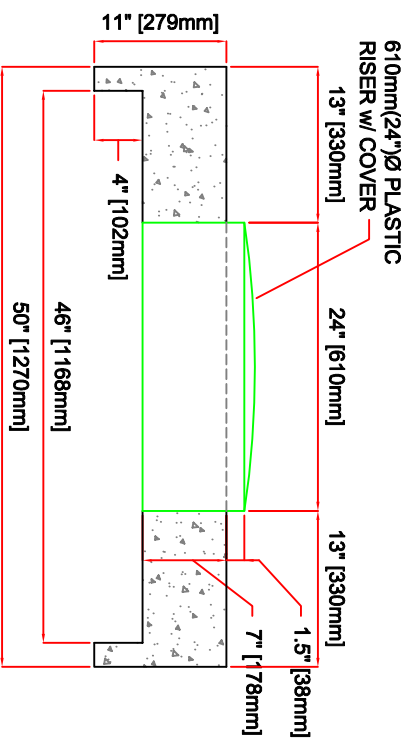

OIL / WATER SEPARATOR TOP SECTION

## Oil / Water Separator 1067mm (42") Inside Diameter

### Details

Concrete Strength: 6500 psi (45 MPa) @ 28 Days  
Air Entraining: 5 - 7%  
Reinforcement: 10 mm Rebar and Structural Fiber  
Joint Seal: Butyl Rope Sealant Or Equivalent  
Design For Earth Dead Load Only  
Maximum Span: 2.0 m (6.5')  
Conforms To CSA B66-M2005

### Options

Plastic Risers or 24" Frame & Grate (Metal)

### Other Notes

Weight: 3500 lb (1590 kg)

ISLAND  
CONCRETE PRODUCTS LTD.  
SYDNEY SITE  
517 KELTIC DR.  
PORT HASTINGS SITE  
522 Hwy 105  
Toll Free: 1-855-562-2426

BROOKFIELD  
CONCRETE PRODUCTS LTD.  
P. O. BOX 37, 778 Hwy 2  
BROOKFIELD, N. S.  
B0N 1C0  
Phone: 902-673-2225  
Toll Free: 1-888-705-2225  
Fax: 902-673-2255

DATE: March 2016  
SCALE: 3/4" = 1'-0"

PROJECT:

LOCATION:  
Sheet # of

**Brookfield Concrete Products Ltd.**  
Your Pre-cast Specialists

e-mail: [info@brookfieldconcrete.ca](mailto:info@brookfieldconcrete.ca)

**Island Concrete Products Ltd.**  
Sydney / Port Hastings

e-mail: [info@islandconcreteproducts.ca](mailto:info@islandconcreteproducts.ca)