

**5680 litres (1250 imp.gal.)
Low Profile Two Piece
Septic Tank
Pg 2 of 2**

Details



Concrete Strength: 6500 psi (45 MPa) @ 28 Days
Air Entrainng: 5 - 7%
Reinforcement: 10 mm Rebar, Structural Fiber,
6x6x6 Gauge Wire Mesh
Joint Seal: Butyl Rope Sealant Or Equivalent
Design For Earth Dead Load Only
Maximum Bury: 1.5m (5')
Conforms To CSA B66-M2005

Options

Alternative Placement Of Inlet Holes
Plastic Risers Are Available

Other Notes

100 mm (4") Pipe Baffles Supplied
Weight: 14,694 lb (6,665 kg)
Conforms To CSA B66M05
(Dalhousie University)

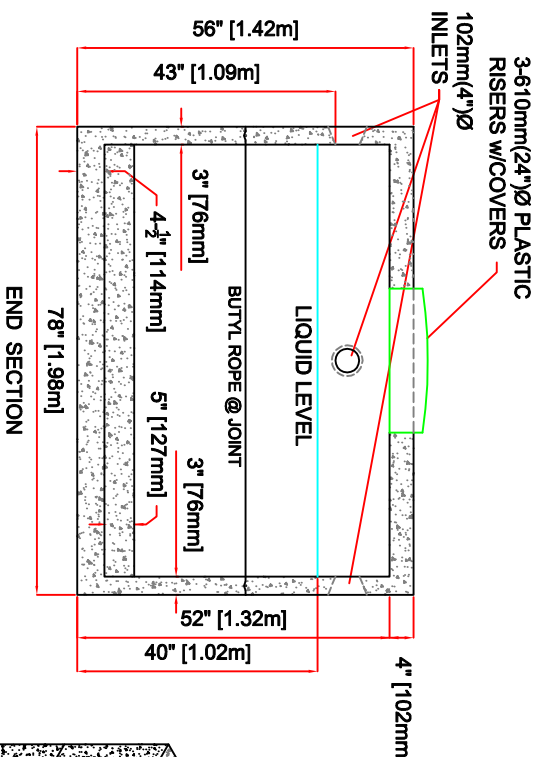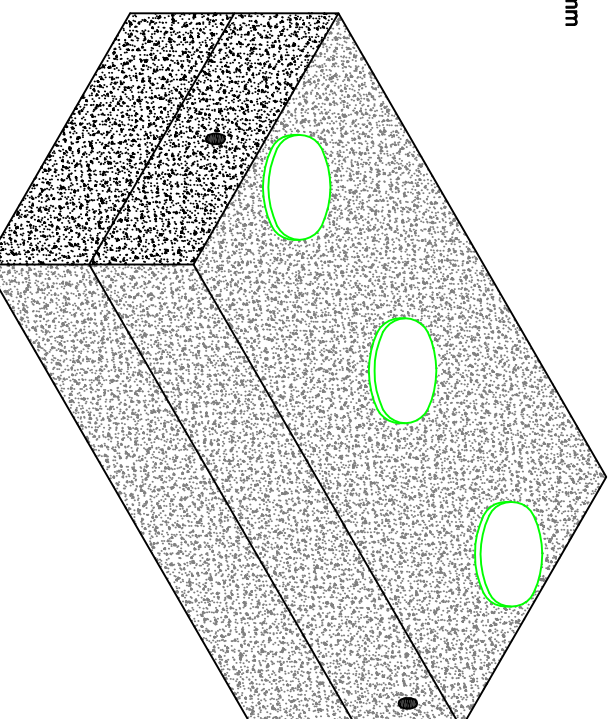

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT:
LOCATION: Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists

e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings

e-mail: info@islandconcreteproducts.ca

BROOKFIELD

CONCRETE PRODUCTS LTD.

P. O. BOX 37, 778 HWY 2

BROOKFIELD, N. S.

B0N 1C0

Phone: 902-673-2225

Toll Free: 1-888-705-2225

Fax: 902-673-2255

ISLAND

CONCRETE PRODUCTS LTD.

SYDNEY SITE

517 KELTIC DR.

Phone: 902-562-2426

PORT HASTINGS SITE

522 Hwy 105

Toll Free: 1-855-562-2426