

**4800 litres (1057 imp.gal.)
Standard Two Piece
Septic Tank
Pg 2 of 2**

Details


Concrete Strength: 6500 psi (45 MPa) @ 28 Days
Air Entrainng: 5 - 7%
Reinforcement: 10 mm Rebar and Structural Fiber
Joint Seal: Butyl Rope Sealant Or Equivalent
Design For Earth Dead Load Only
Maximum Bury: 2.0 m (6.5')
Conforms To CSA B66-M2005

Options

24" Diameter Poured In Place Plastic
Riser And Cover On Inlet End
Alternative Placement Of Inlet And Outlet Holes
Plastic or Concrete Risers

Other Notes

100 mm (4") Pipe Baffles Supplied
Weight: 9,000 lb (4,082 kg)
Conforms To CSA B66M05
(Dalhousie University)

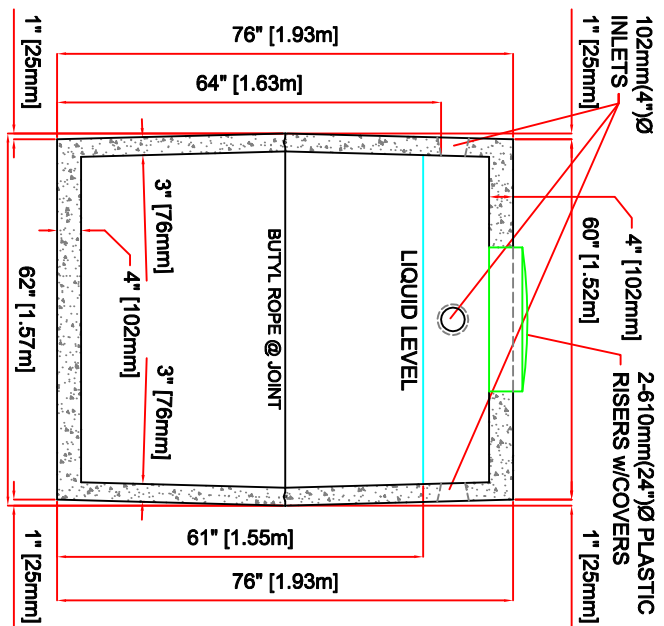

ISOMETRIC VIEW

DATE: March 2016
SCALE: 3/8" = 1'-0"
PROJECT:
LOCATION: Sheet # of

Brookfield Concrete Products Ltd.
Your Pre-cast Specialists

e-mail: info@brookfieldconcrete.ca

Island Concrete Products Ltd.
Sydney / Port Hastings

e-mail: info@islandconcreteproducts.ca

BROOKFIELD

CONCRETE PRODUCTS LTD.

P. O. BOX 37, 778 HWY 2

BROOKFIELD, N. S.

B0N 1C0

Phone: 902-673-2225

Toll Free: 1-888-705-2225

Fax: 902-673-2255

ISLAND
CONCRETE PRODUCTS LTD.

SYDNEY SITE

517 KELTIC DR.

Phone: 902-562-2426

PORT HASTINGS SITE

522 Hwy 105

Toll Free: 1-855-562-2426